

DURACELL®


RECHARGEABLE

D 2200 mAh (DC1300)

Rechargeable NiMH Battery



Reliable Performance in Everyday Devices!






Dimensions shown are IEC standards

Specifications

Nominal Voltage:	1.2V
Nominal Internal Impedance:	45 m-ohm @ 1 kHz
Average Weight:	71.0 grams (2.5 ounces)
Volume:	56.4 cm ³ (3.44 in ³)
Terminals:	Flat
Operating Temperature Range:	-20° C to 50° C (-4° F to 122° F)
ANSI:	1.2H4
IEC:	HR20

Fast Charge (Charge control required)

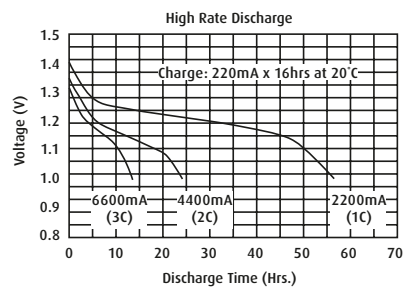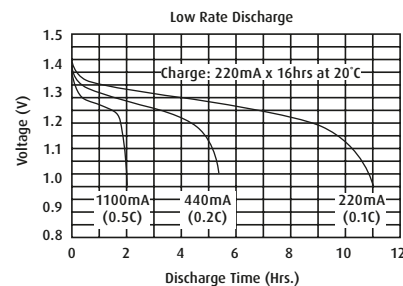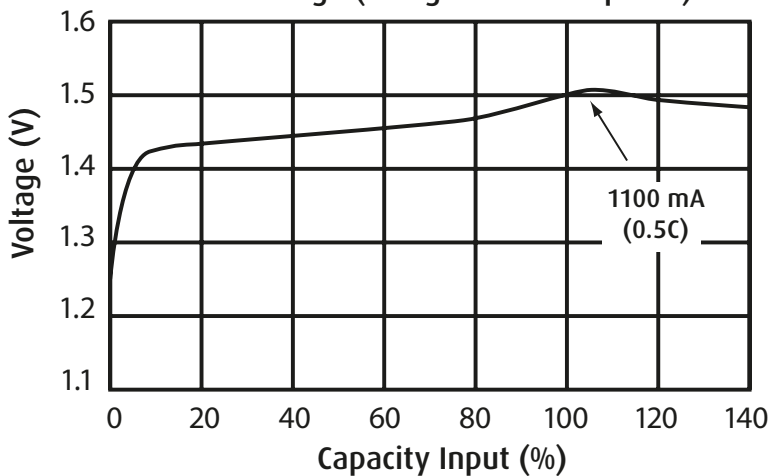

Product can be charged on most NiMH or NiCd chargers utilizing standard dV, dV/dt, time and temperature dynamic charge termination methods. Duracell brand NiMH chargers are recommended for best results.

Delivered capacity is dependent on the applied load, operating temperature, and cut-off voltage. Please refer to the charts and discharge data shown for example of the energy/service life that the battery will provide for various local conditions.

This data is subject to change. Performance information is typical. Contact Duracell for latest information.

DURACELL®

RECHARGEABLE

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone Toll-free:
(North America only) 1-800-544-5454
(Global) 1-203-796-4500
Internet: www.duracell.com